











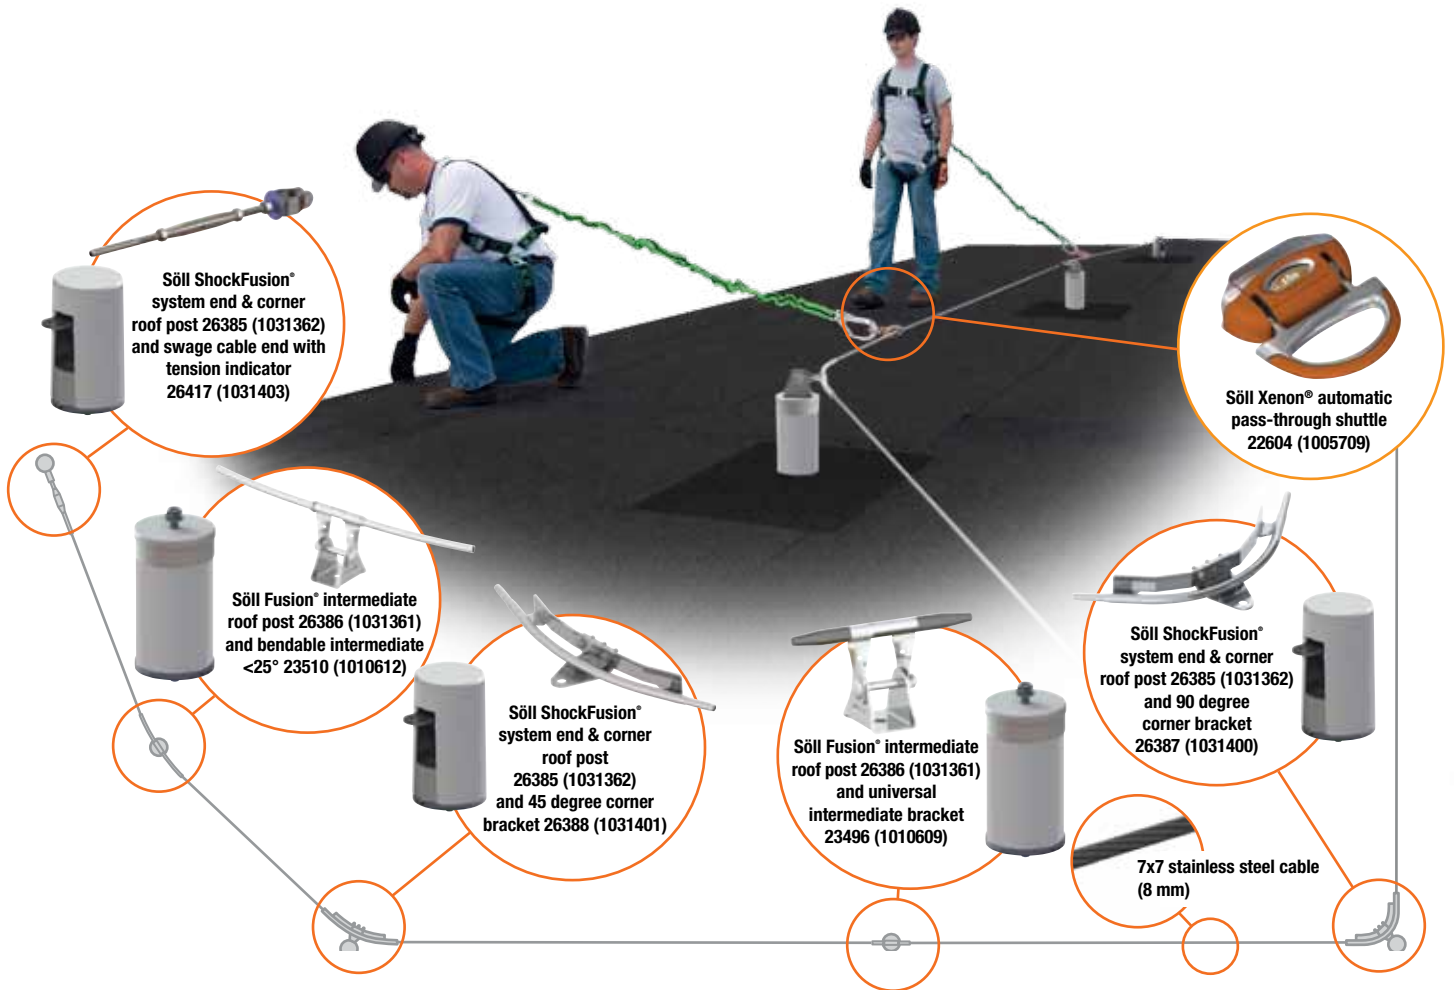








SYSTEM COMPONENT SELECTION GUIDE



Roof posts and top connection assemblies

ROOF POSTS	PAIRED WITH TOP CONNECTION ASSEMBLIES	DESIGNED TO ACCOMMODATE
 <p>26386 (1031361) Söll Fusion® intermediate roof post Keeps forces close to the roof surface for a reduction in force to the post base</p>	 <p>23496 (1010609) Universal intermediate with cable guide - 8 mm</p>	<p>Intermediate connection</p> <ul style="list-style-type: none"> • Straight pass-through • Curves of 5 degrees or less
	 <p>25141 (1019004) Intermediate all stainless steel 316 cable guide - 8 mm</p>	<p>Intermediate connection</p> <ul style="list-style-type: none"> • Straight pass-through • Curves of 5 degrees or less
	 <p>23510 (1010612) Bendable intermediate - 8 mm</p>	<p>Intermediate connection</p> <ul style="list-style-type: none"> • Straight pass-through • Curves of 25 degrees or less
 <p>26385 (1031362) Söll ShockFusion® system end & corner roof post Absorbs energy and reduces line deflection</p>	 <p>26387 (1031400) 90 degree corner bracket</p>	<p>Corner connection</p> <ul style="list-style-type: none"> • Intermediate curves of 75 to 100 degrees
	 <p>26388 (1031401) 45 degree corner bracket</p>	<p>Corner connection</p> <ul style="list-style-type: none"> • Intermediate curves of 25 to 50 degrees
	<p>No top connection required 26482 (1031402), 26417 (1031403), 22609 (1006701), 23500 (1010550), 23936 (1013720), 23938 (1013722)</p>	<p>Various swage and swageless cable ends with or without tension indicator connect the cable lifeline to the system end</p>

Roof post bases and base mounting assemblies

	BASE MOUNTING ASSEMBLIES	DESIGNED TO ACCOMMODATE
 <p>26400 (1031363) Large base for standing seam and membrane roofs</p>	 <p>26405 (1031366) Söll ShockFusion® Premium standing seam clamps kit</p>	Connection of Söll ShockFusion end & corner post to standing seam spacing from 298 mm to 540 mm
	 <p>26406 (1031368) Söll ShockFusion® Premium standing seam extension bars kit</p>	Connection of Söll ShockFusion end & corner post to standing seam spacing from 540 mm to 610 mm
	 <p>26404 (1031365) Söll Fusion® Premium standing seam clamps kit</p>	Connection of Söll Fusion intermediate post to standing seam spacing from 298 mm to 540 mm
	 <p>26407 (1031367) Söll Fusion® Premium standing seam extension bars kit</p>	Connection of Söll Fusion intermediate post to standing seam spacing from 540 mm to 610 mm
	 <p>26450 (1031370) Söll ShockFusion® standard standing seam clamps kit</p>	Connection of Söll ShockFusion end & corner post to standing seam spacing from 300 mm to 600 mm
	 <p>26421 (1031372) Toggle bolt for membrane roofing up to 150 mm (1 piece)</p>	Connection of Söll ShockFusion or Söll Fusion post through membrane , insulation and into metal sheeting, with a combined thickness of up to 150 mm. Toggle bolt sold per one piece.
	 <p>26422 (1031373) Toggle bolt for membrane roofing from 150 to 280 mm (1 piece)</p>	Connection of Söll ShockFusion or Söll Fusion post through membrane , insulation and into metal sheeting, with a combined thickness of > 150 mm up to 280 mm. Toggle bolt sold per one piece.
 <p>26402 (1031364) Multipurpose base for metal sheeting and concrete roofs</p>	 <p>26420 (1031371) Rivet kit with sealing washers & mastic tape for metal sheeting trapezoidal</p>	Connection of Söll ShockFusion or Söll Fusion post to metal sheeting with minimum thickness of 0.5 mm
	 <p>26447 (1031375) Concrete expansion bolt anchor kit</p>	Connection of Söll ShockFusion or Söll Fusion post to concrete decking with minimum thickness of 165 mm and minimum concrete compressive strength of 20 N/mm ² (C 20/25 - C 50/60)

Shuttle, cable and lifeline installation components

 <p>22604 (1005709) Söll Xenon® automatic pass-through shuttle Self-aligns for smooth pass-through of intermediate and corner brackets. A double-locking mechanism ensures security, yet allows for easy, one-hand operation.</p>	 <p>22613 (1015900) 7x7 Stainless steel cable Cable diameter of 8 mm</p>
 <p>26482 (1031402) Swageless cable end with tension indicator Includes a turnbuckle mechanism for tensioning and tension indicator to show when properly tensioned. Accommodates 8 mm cable.</p>	 <p>26415 (1031471) Identification plate, aluminium, D/E/F/NL</p>
 <p>26417 (1031403) Swage cable end with tension indicator Includes a turnbuckle mechanism for tensioning and tension indicator to show when properly tensioned. Accommodates 8 mm cable.</p>	 <p>23938 (1013722) Swageless cable end with tensioner Accommodates 8 mm cable.</p>
 <p>23936 (1013720) Swageless cable end Accommodates 8 mm cable.</p>	 <p>23500 (1010550) Swage cable end with tensioner Accommodates 8 mm cable.</p>
	 <p>22609 (1006701) Swage cable end Accommodates 8 mm cable.</p>

For technical questions:

Systems Customer Service (Hof, Germany)

Phone: +49 9281 8302 0 - Email: soell@sperian.com



by Honeywell