

# Miller TurboLite™ PFL

## Description

The unique 6-foot TurboLite Personal Fall Limiter (PFL) provides the same working capacity as a traditional shock-absorbing lanyard while instantly arresting a free fall within inches rather than the 3-1/2 feet needed for lanyards.

## Materials

<b>Housing:</b>	High impact nylon
<b>Hub:</b>	Shock-absorbing engineered co-polymer
<b>Braking Mechanism:</b>	Stainless steel
<b>Webbing:</b>	Vectran core, polyester jacket 1" wide x 0.06" thick (25.4mm x 1.5mm)


## Technical

<b>Maximum Working Load:</b>	400lbs (181kg)
<b>Working Length Capacity:</b>	6ft (1.8m)
<b>Maximum Arresting Force:</b>	<900lbf (4kN) for up to 310lbs. (140kg) Working Load  <1800lbf (8kN) for up to 400lbs. (181kg) Working Load

## Certification

Meets OSHA 1926.502, 1910.66, ANSI A10.32, \*ANSI Z359-2007 and CSA Z259.2.2 Type 1 requirements.

\*ANSI Z359-2007 compliant for connectors which meet the 3,600lb gate requirements.

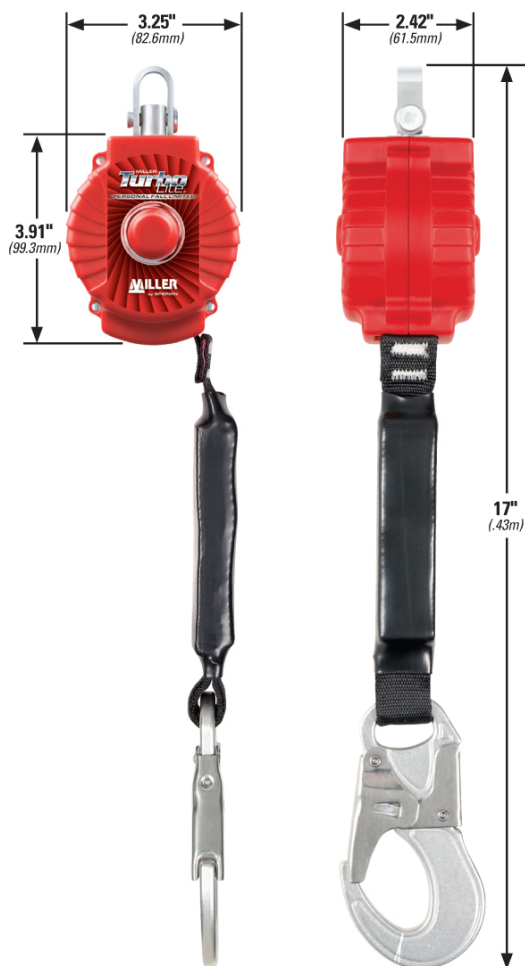

SKU	Description and Unit Connector	Lanyard End Connector	Weight
<b>ANSI Z359-2007 Compliant</b>			
MFL-1-Z7/6FT	TurboLite w/Steel Twist-Lock Carabiner	ANSI Z359-2007 Compliant Locking Snap Hook	2.5lbs (1.13kg)
MFL-2-Z7/6FT	TurboLite w/Steel Twist-Lock Carabiner	ANSI Z359-2007 Compliant Locking Rebar Hook	3.4lbs (1.54kg)
MFL-3-Z7/6FT	TurboLite without unit connector	ANSI Z359-2007 Compliant Locking Snap Hook	2.0lbs (0.91kg)
MFL-4-Z7/6FT	TurboLite without unit connector	ANSI Z359-2007 Compliant Locking Rebar Hook	2.9lbs (1.32kg)
MFL-5-Z7/6FT	TurboLite without unit connector	ANSI Z359-2007 Compliant Locking Swivel Snap Hook	2.1lbs (0.95kg)
MFL-9-Z7/6FT	TurboLite w/ANSI Z359-2007 Compliant Locking Snap Hook	ANSI Z359-2007 Compliant Locking Snap Hook	2.7lbs (1.22kg)
MFL-10-Z7/6FT	TurboLite w/ANSI Z359-2007 Compliant Locking Snap Hook	ANSI Z359-2007 Compliant Locking Rebar Hook	3.6lbs (1.63kg)

# Miller TurboLite™ PFL

SKU	Description and Unit Connector	Lanyard End Connector	Weight
<b>ANSI A10.32 Compliant</b>			
MFL-1/6FT	TurboLite w/Steel Twist-Lock Carabiner	Locking Snap Hook	2.4lbs (1.09kg)
MFL-2/6FT	TurboLite w/Steel Twist-Lock Carabiner	Locking Rebar Hook	3.1lbs (1.41kg)
MFL-3/6FT	TurboLite without unit connector	Locking Snap Hook	1.9lbs (0.86kg)
MFL-4/6FT	TurboLite without unit connector	Locking Rebar Hook	2.6lbs (1.18kg)
MFL-5/6FT	TurboLite without unit connector	Locking Swivel Snap Hook	2.1lbs (0.95kg)
MFL-6/6FT	TurboLite without unit connector	Locking Swivel Rebar Hook	2.7lbs (1.22kg)
MFL-7/6FT	TurboLite w/D-ring Swivel Hook	Locking Snap Hook	2.3lbs (1.04kg)
MFL-8/6FT	TurboLite w/D-ring Swivel Hook	Locking Rebar Hook	3.0lbs (1.36kg)
MFL-9/6FT	TurboLite w/Locking Snap Hook	Locking Snap Hook	2.5lbs (1.13kg)
MFL-10/6FT	TurboLite w/Locking Snap Hook	Locking Rebar Hook	3.2lbs (1.45kg)
MFL-11/6FT	TurboLite w/Aluminum Twist-Lock Carabiner	Aluminum Locking Snap Hook	1.9lbs (0.86kg)
MFL-12/6FT	TurboLite w/Aluminum Twist-Lock Carabiner	Aluminum Locking Rebar Hook	2.6lbs (1.18kg)



Toll Free 800-873-5242 • Phone 814.432.2118 • Fax 814.437.2973 • [www.millerfallprotection.com](http://www.millerfallprotection.com)

**WARNING!** THIS DOCUMENT PROVIDES AN OVERVIEW OF FALL PROTECTION PRODUCTS AVAILABLE FROM MILLER FALL PROTECTION AND CARE HAS BEEN TAKEN TO ASSURE THE ACCURACY OF THE DATA. IT DOES NOT PROVIDE IMPORTANT PRODUCT WARNINGS AND INSTRUCTIONS. MILLER FALL PROTECTION RECOMMENDS ALL USERS OF FALL PROTECTION EQUIPMENT UNDERGO THOROUGH TRAINING, AND THAT ALL WARNINGS AND INSTRUCTIONS PROVIDED WITH THE PRODUCTS BE THOROUGHLY READ AND UNDERSTOOD PRIOR TO EACH USE. FAILURE TO READ AND FOLLOW ALL PRODUCT WARNINGS AND INSTRUCTIONS COULD RESULT IN SERIOUS INJURY OR DEATH.