

New!

MILLER
Turbo
Lite™

PERSONAL FALL LIMITER

**COMPACT &
LIGHTWEIGHT**
ONLY 1.9 lbs. (.86kg)

- Never Need a Shock-Absorbing Lanyard Again
- Reduces Risk/Liability



Actual Size

**PEAK
PERFORMANCE**

MILLER®
by SPERIAN



MILLER **TurboLite™**

PERSONAL FALL LIMITER

**Never need a
shock-absorbing lanyard
AGAIN!**

The cost-effective and competitive pricing of the new Miller TurboLite™ Personal Fall Limiters will make shock-absorbing lanyards obsolete on the jobsite. With the compact and lightweight TurboLite PFL, workers will no longer need to “switch-out” equipment to maintain a safe fall distance.


MILLER TURBOLITE PFL FEATURES INCLUDE:

- First affordable alternative to shock-absorbing lanyards
- Extremely compact and lightweight (1.9 lbs. [.86kg]) provides 6 ft. (1.8m) working capacity lifeline; unit attaches directly to the harness back D-ring for greater mobility and versatility
- Engineered webbing for greater abrasion resistance and long service life
- High-strength, impact-resistant nylon housing for maximum durability
- Built-in swivel prevents lifeline from twisting
- Rated for up to a 400 lb. (181.4kg) user
- No annual factory recertification required
- Meets global standards for international companies; meets all applicable OSHA, ANSI A10.32 and Z359-2007, and CSA standards

The benefits will have a positive impact on your safety concerns and your bottom line:

- Eliminates the need for different fall protection equipment to address fall clearance
- Reduces risk because workers are using the proper equipment when fall clearance changes
- Increases productivity by keeping workers on the job longer
- Miller TurboLite Personal Fall Limiters are competitively priced with shock-absorbing lanyards and will keep safety costs in line

FAST-ACTING FALL PROTECTION YOU CAN TRUST

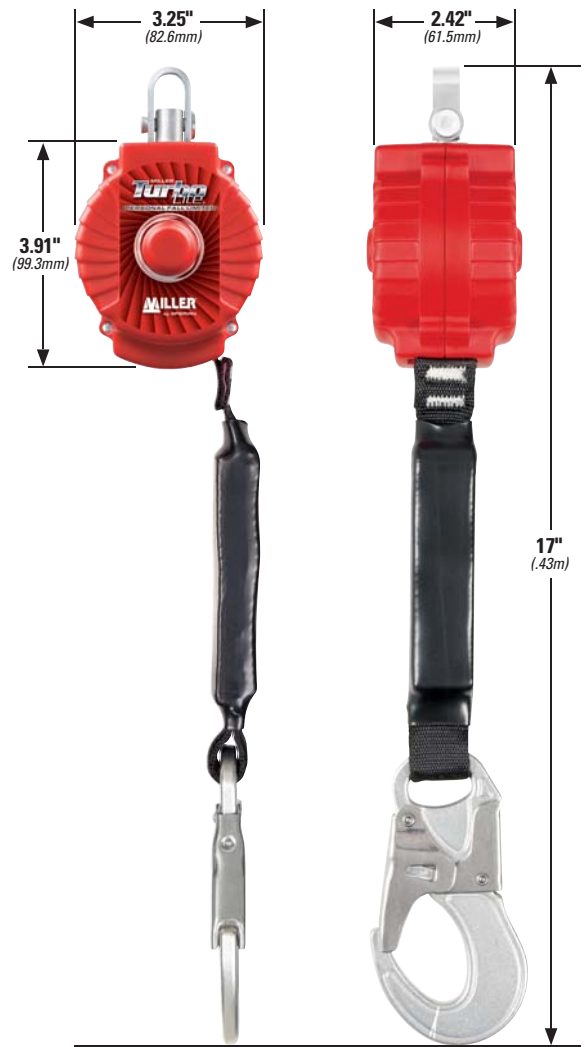

SPECIFICATIONS


MATERIALS

Housing:	High impact nylon
Hub:	Shock-absorbing engineered co-polymer
Braking Mechanism:	Stainless steel
Webbing:	Vectron core, polyester jacket 1" wide x 0.06" thick (25.4mm x 1.5mm)
Snap Hook:	Aluminum, locking snap hook with 3/4" (19.1mm) gate opening


TECHNICAL

Maximum Working Load:	400 lbs. (181.4kg)
Working Capacity:	6 ft. (1.8m) web lifeline
Maximum Arresting Force:	<900 lb./f (4kN) for up to 310 lbs. (140.6kg) working load <1800 lb./f (8kN) for up to 400 lbs. (181.4kg) working load
Weight:	1.9 lbs. (.86kg) (Model MFL-11/6 ft)

The unique 6-foot (1.8m) TurboLite PFL provides the same working capacity as a traditional shock-absorbing lanyard while instantly arresting a free fall within inches rather than the 3-1/2 feet (1.1m) needed for lanyards.

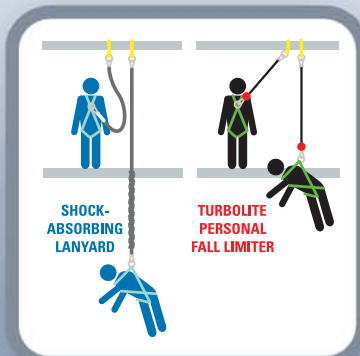

**REQUIRES LESS
FALL CLEARANCE**

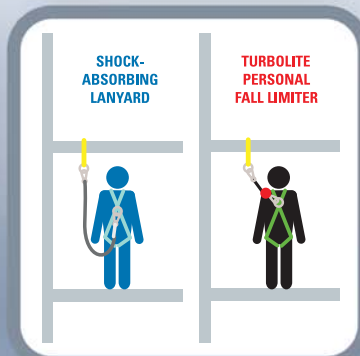

**PREVENTS
TRIPPING HAZARD**

TurboLite™ Personal Fall Limiter (PFL)

SKU	Description and Unit Connector	Lanyard End Connector
ANSI Z359-2007 Compliant		
MFL-1-Z7/6FT	TurboLite w/Steel Twist-Lock Carabiner	ANSI Z359-2007 Compliant Locking Snap Hook
MFL-2-Z7/6FT	TurboLite w/Steel Twist-Lock Carabiner	ANSI Z359-2007 Compliant Locking Rebar Hook
MFL-3-Z7/6FT	TurboLite without unit connector	ANSI Z359-2007 Compliant Locking Snap Hook
MFL-4-Z7/6FT	TurboLite without unit connector	ANSI Z359-2007 Compliant Locking Rebar Hook
MFL-5-Z7/6FT	TurboLite without unit connector	ANSI Z359-2007 Compliant Locking Swivel Snap Hook
MFL-9-Z7/6FT	TurboLite w/ANSI Z359-2007 Compliant Locking Snap Hook	ANSI Z359-2007 Compliant Locking Snap Hook
MFL-10-Z7/6FT	TurboLite w/ANSI Z359-2007 Compliant Locking Snap Hook	ANSI Z359-2007 Compliant Locking Rebar Hook
ANSI A10.32 Compliant		
MFL-1/6FT	TurboLite w/Steel Twist-Lock Carabiner	Locking Snap Hook
MFL-2/6FT	TurboLite w/Steel Twist-Lock Carabiner	Locking Rebar Hook
MFL-3/6FT	TurboLite without unit connector	Locking Snap Hook
MFL-4/6FT	TurboLite without unit connector	Locking Rebar Hook
MFL-5/6FT	TurboLite without unit connector	Locking Swivel Snap Hook
MFL-6/6FT	TurboLite without unit connector	Locking Swivel Rebar Hook
MFL-7/6FT	TurboLite w/D-ring Swivel Hook	Locking Snap Hook
MFL-8/6FT	TurboLite w/D-ring Swivel Hook	Locking Rebar Hook
MFL-9/6FT	TurboLite w/Locking Snap Hook	Locking Snap Hook
MFL-10/6FT	TurboLite w/Locking Snap Hook	Locking Rebar Hook
MFL-11/6FT	TurboLite w/Aluminum Twist-Lock Carabiner	Aluminum Locking Snap Hook
MFL-12/6FT	TurboLite w/Aluminum Twist-Lock Carabiner	Aluminum Locking Rebar Hook

Unit Connectors



Steel Twist-Lock Carabiner
1" (25.4mm) Gate Opening



ANSI Z359-2007 Locking Snap Hook
3/4" (19.1mm) Gate Opening



D-Ring Swivel Hook
3/8" (9.5mm) Gate Opening



Locking Snap Hook
3/4" (19.1mm) Gate Opening



Aluminum Twist-Lock Carabiner
1" (25.4mm) Gate Opening



Without Unit Connector

Lanyard End Connectors



ANSI Z359-2007 Locking Snap Hook
3/4" (19.1mm) Gate Opening



Locking Snap Hook
3/4" (19.1mm) Gate Opening



Locking Swivel Rebar Hook
2-1/2" (63.5mm) Gate Opening



ANSI Z359-2007 Locking Rebar Hook
2-1/2" (63.5mm) Gate Opening



Locking Rebar Hook
2-1/2" (63.5mm) Gate Opening



Aluminum Locking Snap Hook
3/4" (19.1mm) Gate Opening



ANSI Z359-2007 Locking Swivel Snap Hook
3/4" (19.1mm) Gate Opening



Locking Swivel Snap Hook
3/4" (19.1mm) Gate Opening



Aluminum Locking Rebar Hook
2-1/2" (63.5mm) Gate Opening

This equipment should only be used in conjunction with the manufacturer's instructions. Failure to follow instructions could result in serious injury or fatality.



Ask the Expert ... Ask Miller.

800/873-5242
or 814/432-2118

Fax 800/892-4078
or Fax 814/432-2415

www.millerfallprotection.com



For more information or to place an order, please contact your Miller® distributor:

LMTL/0308/30M/RPI