




# P2 Nuisance Odour Respirator Valved

## Product description

A fully featured premium cup shape respirator suggested for protection against dusts, mists and fumes/ particulate aerosols free of oil, with charcoal layer filter for nuisance level acid gas relief.

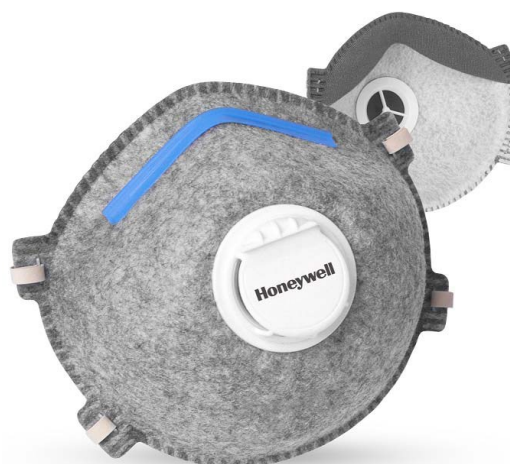

## FEATURES

- Approved for 10 times the exposure standard of dusts produced by grinding, drilling, certain applications of brazing and welding etc.
- Shaped for better fit when worn in combination with eyewear.
- Low breathing resistance encourages longer wear time by improving the wearer's comfort.
- Humidity resistant and hypoallergenic filter media for maximum respirator service life.
- Durable latex-free suspension straps to eliminate pre-stretching.
- Staples do not penetrate filter medium.
- Willtech™ boomerang nose seal absorbs perspiration providing increased comfort.
- Flame retardant outer shell ensures greater safety.
- No restriction of vision or communication.
- Exhalation valve increases wearer comfort in hot or humid workplaces
- Charcoal layer provides relief from nuisance levels of acid gases.

## APPLICATIONS

- Agriculture, Chemical, Construction, Fire Protection, Food services, forestry, manufacturing, mining, municipal services, oil & gas, pharmaceutical, steel & metal, utilities

## HAZARDS

- Airborne particulates—dust/mist/fume, Nuisance Acid gas

## Technical Details

Seal :	Fitted with half-face seal (PES knit, PU foam, PU film).
Attachment Information :	Twin elastics stapled outside the filtering area.
Outer Shell :	150g/m <sup>2</sup> polyester non-woven.
Filter Media :	Polypropylene non-woven fibres electrostatically loaded making them attractive to particles.
Nose Bridge :	Galvanised iron wire coated with polypropylene (contains no aluminium).
Weight :	10g
Shelf Life:	3 years from date of manufacture.

## Standards

- Certified to AS/NZS 1716:2012
- License No:1134 for effective protection against mechanically and thermally generated dusts, mists & fumes and nuisance level acid gases.

All Honeywell products are tested to meet or exceed the stated protection levels for fine particulates indicated on the product packaging.

In addition, they may provide moderate odour relief from certain acid gasses which are present in concentrations BELOW the workplace exposure limits

## Ordering Details

PART NO.	DESCRIPTION	SIZE	MIN QTY	BOX QTY	CASE QTY	BOX DIMENSIONS	BARCODE
1007714	5621 premium P2, valved, nuisance levels of acid gases (aluminium smelting)	Standard	1 carton	20	10	250x140x195	3603830077142

WARNING! THIS DOCUMENT PROVIDES AN OVERVIEW OF PERSONAL PROTECTIVE PRODUCTS AVAILABLE FROM HONEYWELL SAFETY PRODUCTS AND CARE HAS BEEN TAKEN TO ASSURE THE ACCURACY OF THE DATA. IT DOES NOT PROVIDE IMPORTANT PRODUCT WARNINGS AND INSTRUCTIONS. HONEYWELL SAFETY PRODUCTS RECOMMENDS ALL USERS OF ANY PERSONAL PROTECTIVE EQUIPMENT UNDERGO THOROUGH TRAINING, AND THAT ALL WARNINGS AND INSTRUCTIONS PROVIDED WITH THE PRODUCTS BE THOROUGHLY READ AND UNDERSTOOD PRIOR TO EACH USE. FAILURE TO READ AND FOLLOW ALL PRODUCT WARNINGS AND INSTRUCTIONS COULD RESULT IN SERIOUS INJURY.

## Honeywell Safety Products Australia Pty Ltd

Australia 1300 139 166  
 New Zealand 0800 322 200  
[www.honeywellsafety.com](http://www.honeywellsafety.com)